

Features

- Low insertion loss
- Good repeatability
- Application:  
Fiber optic communication system, fiber optic CATV  
fiber optic data transmission, LAN
- Cable complies with IEC60332-1-2:2015, IEC61034-2:2019,  
IEC60754-1:2019, IEC60793, IEC62321:2008, IEC62321-5,  
ITU-TG652


Fiber Pigtail  
FPT Series



Specifications

Specification	Single Mode			Multimode
	PC	UPC	APC	UPC
Operating Wavelength	1310nm, 1550nm			850nm, 1300nm
Insertion Loss	≤0.3dB	≤0.3dB	≤0.3dB	≤0.3dB
Return Loss	>40dB	>50dB	>60dB	/
Fiber Type	G.652D/G.65A1/G.657A2			OM2/OM3/OM4
Exchange				≤0.2dB
Repeatability				≤0.2dB
Service Life				>1000 times
Connectors Type				SC, LC, FC, ST
Cable Type				Tight Buffer
Sheath Materials				PVC/LSZH
Loose Sleeve				900μm
Length				Customized
Tensile Strength				>10kg
Temperature Range				-40°C~85°C

How to Order :

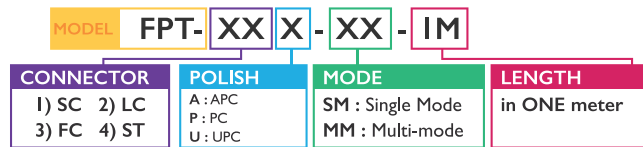

Remember to State :

- 1) Number of Core(s)    2) Type of Coupler    3) Mode of fiber

Cable Construction Diagram:

