



### Features


- Comply with ANSI/EIA, RS-310-D; IEC297-2; DIN41491: PART 1; DIN41491: PART 7; GB/T3047.2-92 standard
- Door lockable
- LC & SC adapter available
- Supplied with accessories

### Specifications

Model		FTMB-METAL-4D Series	FTMB-METAL-8D-Series	FTMB-METAL-16D-Series
For Number of Coupler		4	8	16
Capacity	LC	4 Capacity / 8 cores (Max.)	8 Capacity / 16 cores (Max.)	16 Capacity / 32 cores (Max.)
	SC	4 Capacity / 4 cores (Max.)	8 Capacity / 8 cores (Max.)	16 Capacity / 16 cores (Max.)
	ST	4 Capacity / 4 cores (Max.)	8 Capacity / 8 cores (Max.)	16 Capacity / 16 cores (Max.)
	FC	4 Capacity / 4 cores (Max.)	8 Capacity / 8 cores (Max.)	16 Capacity / 16 cores (Max.)
Dimension		140 x 105 x 28mm	200 x 148 x 30 mm	245 x 200 x 48 mm
Number of Door		1	1	1

Model		FTMB-METAL-12D Series	FTMB-METAL-48D Series
For Number of Couplers		12	48
Capacity	LC	12 Capacity / 24 cores (Max.)	48 Capacity / 96 cores (Max.)
	SC	12 Capacity / 12 cores (Max.)	48 Capacity / 48 cores (Max.)
	ST	12 Capacity / 12 cores (Max.)	48 Capacity / 48 cores (Max.)
	FC	12 Capacity / 12 cores (Max.)	48 Capacity / 48 cores (Max.)
Dimension		230mm x 230mm x 85mm	376 x 355 x 115 mm
Number of Door		1	2

### How to Order :

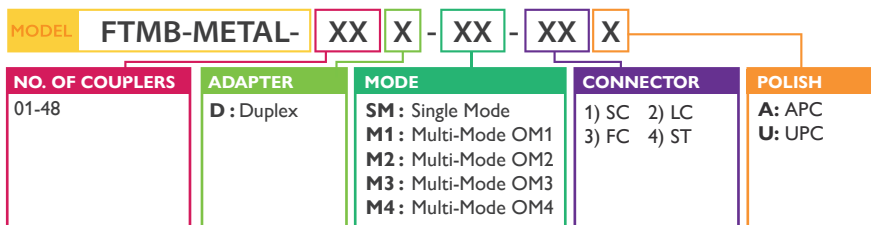

### Remember to State :

- 1) Number of Core(s)    2) Type of Coupler    3) Mode of fiber

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.