




Features

- Power limited controls
- Single line telephone
- Security systems

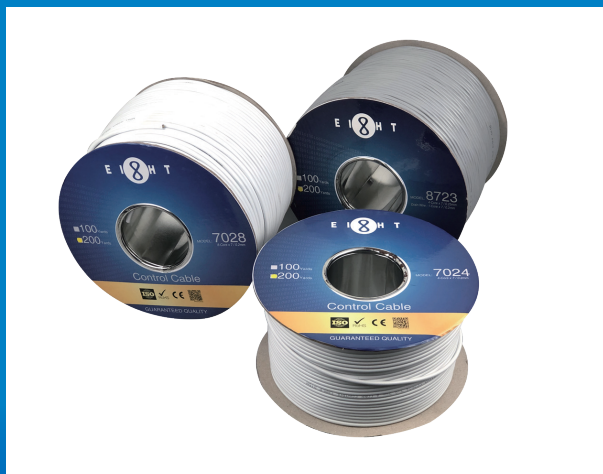

Specifications

Model	7024	7024 LSZH	7028	7028 LSZH	8723	8723 LSZH	8761	8761 LSZH
Conductor	<i>Material</i>	TC	TC	TC	TC	TC	TC	TC
	<i>Cores</i>	4	4	8	8	2x2	2	2
	<i>Max Resistance(20°C)</i>	80 Ω/km	80 Ω/km	80 Ω/km	80 Ω/km	52 Ω/km	52 Ω/km	52 Ω/km
	<i>Construction(No./mm)</i>	7 / 0.2 mm	7 / 0.2 mm	7 / 0.2 mm	7 / 0.2 mm	7 / 0.25 mm	7 / 0.25 mm	7 / 0.25 mm
Insulation	<i>Insulation</i>	PVC	PP	PVC	PP	PVC	PP	PVC
	<i>Insulation Dielectric</i>	1.1 mm ± 0.1 mm	1.1 mm ± 0.1 mm	1.2 mm ± 0.1 mm	2.1 mm ± 0.1 mm			
	<i>Insulation Color</i>	White, Black, Orange, Red	White, Black, Orange, Red, Blue, Green, Yellow, Brown	White, Black, Green, Red	White & Black			
Shield		/	/	/	AL Foil	AL Foil		
Drain wire	<i>No./mm</i>	/	/	/	7/0.2 mmTC	7 / 0.25 mmTC		
Jacket	<i>Jacket Material</i>	PVC	LSZH	PVC	LSZH	PVC	LSZH	LSZH
	<i>Jacket Color</i>	White	White	White	Grey	Grey		
	<i>Jacket Thickness</i>	0.6 mm ± 0.05 mm	0.65 mm ± 0.05 mm	0.7 mm ± 0.05 mm	0.85 mm ± 0.05 mm			
	<i>Jacket O.D</i>	4.1 mm ± 0.2 mm	5.1 mm ± 0.2 mm	5.2 mm ± 0.2 mm	5.4 mm ± 0.2 mm			
Operation Temperature		-20 °C ~ +60 °C	-20 °C ~ +60 °C	-20 °C ~ +60 °C	-20 °C ~ +60 °C			
Length		100 Yards / 200 Yards	200 Yards / 300M	100 Yards / 200 Yards / 300M	200 Yards / 300M	100 Yards / 200 Yards / 300M	200 Yards / 300M	200 Yards / 300M
Construction								

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.