



Open Rack Series

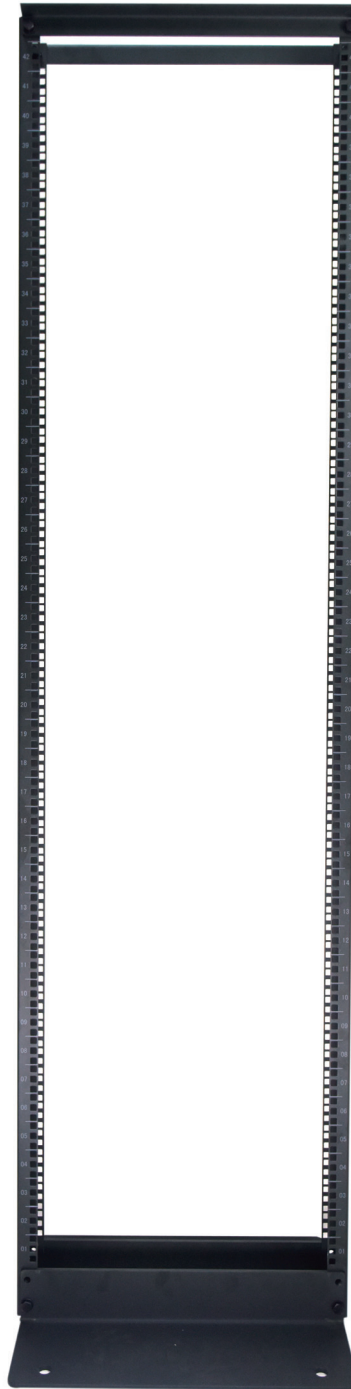

STATIC LOADING CAPACITY

50KG

Open Rack Series

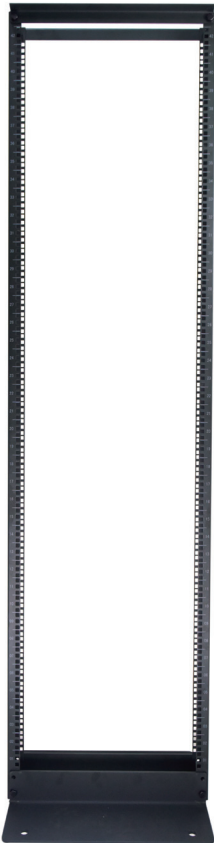

Standard

- Comply with ANSI/EIA, RS-310-D; IEC297-2; DIN41491: PART 1; DIN41491: PART 7; GB/T3047.2-92 standard, compatible with 19" international standard, metric system and ETSI standard

Features

- Knock down, simple design
- Low cost
- Easy installation

Materials


- SPCC cold rolling steel



Silk printed U level indicator




Hex Bolt

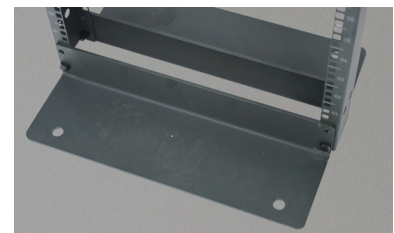


Lower beam, fixed onto ground


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

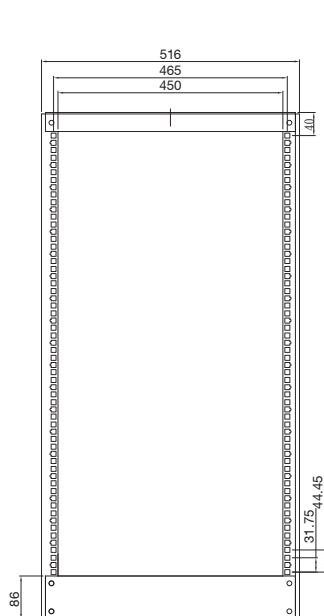

FRONT VIEW

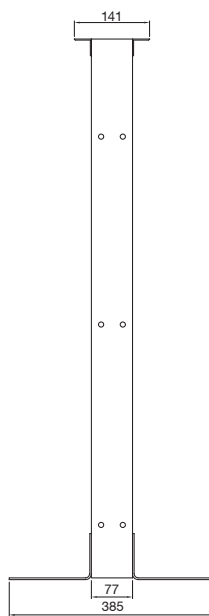

SIDE VIEW



Top

Open Rack				
Model	Capacity (U)	Width (mm)	Height (mm)	Approx Weight (KG)
FOR15	15	516	790	16
FOR18	18	516	930	17
FOR22	22	516	1100	18
FOR27	27	516	1330	19
FOR32	32	516	1550	20
FOR37	37	516	1770	20.5
FOR40	40	516	1900	21
FOR42	42	516	1990	21.5
FOR45	45	516	2130	22
FOR47	47	516	2200	22.5



2U Equipment Vertical Installation Wall Mount

Standard

- Comply with ANSI/EIA, RS-310-D, IEC297-2, DIN41491: part 1; DIN41494: part 7; GB/T3047.2-92 standard, compatible with 19" international standard, metric system and ETSI standard

Features


- Simple design
- Low cost
- Easy installation

Materials

- SPCC cold rolling steel

2U Equipment Vertical Installation Wall Mount

Model	Capacity (U)	Width (mm)	Depth (mm)	Height (mm)	Approx Weight (KG)
2UVRWM	2	495	105	100	1.5

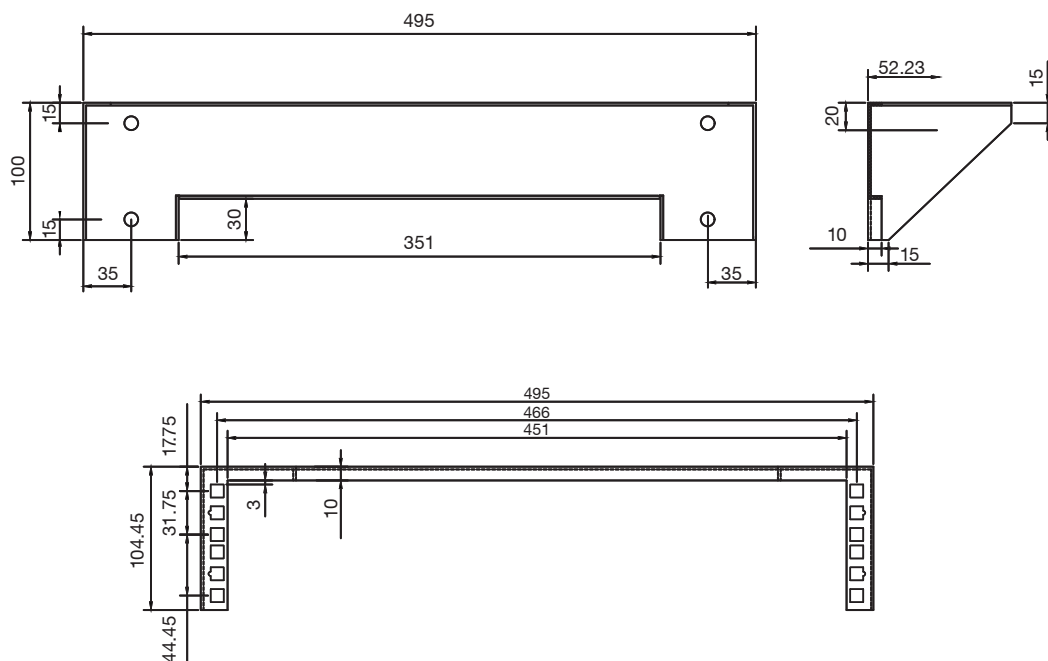

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.