



# Wall Mount Series

---



STATIC LOADING CAPACITY

60KG

# Wall Mount Series



## Standard

- Comply with ANSI/EIA RS-310-D; IEC297-2; DIN41491: PART 1; DIN41491: PART 7; GB/T3047.2-92 standard, compatible with 19" international standard, metric system and ETSI standard

## Features

- Reliable structure, static loading capacity : 60KG
- Castor option are available
- Tempered glass front door and real access panel
- Bottom cable entries
- Front door, real door and side panel can be easily removed
- Optional accessories

## Materials

- SPCC cold rolling steel
- Mounting profile thickness: 1.5mm ; Others: 1.2mm



Adjustable mounting rail



Front door with security lock



Detachable side panel  
(security lock is optional)



Simple and rigid hanging bracket design  
for easy installation



Fan unit for efficient heat dissipation



Top ventilation with brush plate for  
cables management

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

## EIGHT LIMITED

No.18, 4/F, Thriving Industrial Centre, 26-38 Sha Tsui Road, Tsuen Wan, N.T., Hong Kong TEL : (852) 2413 2222 FAX : (852) 2411 3000 EMAIL : info@eightgroup.com

# Wall Mount Series



Glass Door



Side Panel



Real Access Panel

## Wall Mount Rack Cabinet


| Model  | Capacity (U) | Width (mm) | Depth (mm) | Height (mm) | Approx Weight (KG) |
|--------|--------------|------------|------------|-------------|--------------------|
| 0464WM | 4            | 600        | 450        | 278         | 15                 |
| 0466WM | 4            | 600        | 600        | 278         | 18.5               |
| 0468WM | 4            | 600        | 800        | 278         | 20                 |
| 0664WM | 6            | 600        | 450        | 367         | 16                 |
| 0666WM | 6            | 600        | 600        | 367         | 20.5               |
| 0668WM | 6            | 600        | 800        | 367         | 23                 |
| 0964WM | 9            | 600        | 450        | 500         | 20                 |
| 0966WM | 9            | 600        | 600        | 500         | 24                 |
| 0968WM | 9            | 600        | 800        | 500         | 27                 |
| 1264WM | 12           | 600        | 450        | 650         | 23                 |
| 1266WM | 12           | 600        | 600        | 650         | 28                 |
| 1268WM | 12           | 600        | 800        | 650         | 31                 |
| 1564WM | 15           | 600        | 450        | 775         | 26                 |
| 1566WM | 15           | 600        | 600        | 775         | 31                 |
| 1568WM | 15           | 600        | 800        | 775         | 36                 |
| 1864WM | 18           | 600        | 450        | 908         | 29                 |
| 1866WM | 18           | 600        | 600        | 908         | 35                 |
| 1868WM | 18           | 600        | 800        | 908         | 40                 |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


**EIGHT LIMITED**

No.18, 4/F, Thriving Industrial Centre, 26-38 Sha Tsui Road, Tsuen Wan, N.T., Hong Kong TEL : (852) 2413 2222 FAX : (852) 2411 3000 EMAIL : info@eightgroup.com


# Dimensions

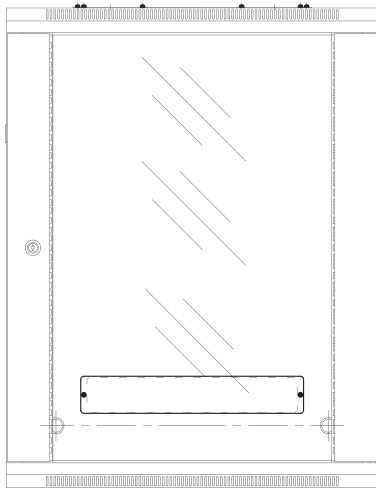


FRONT VIEW  
(with door)

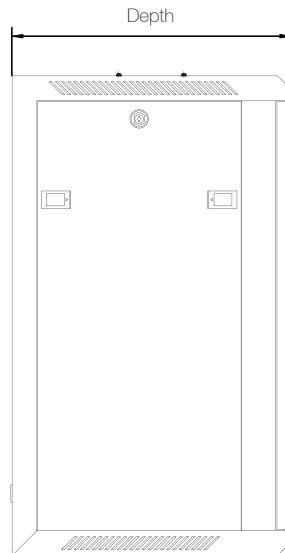

SIDE VIEW

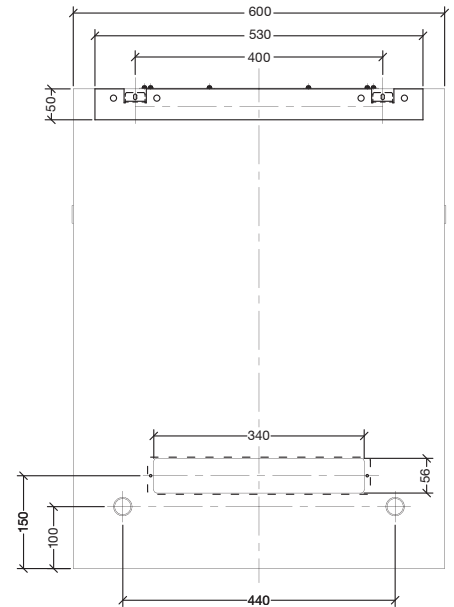

BACK VIEW

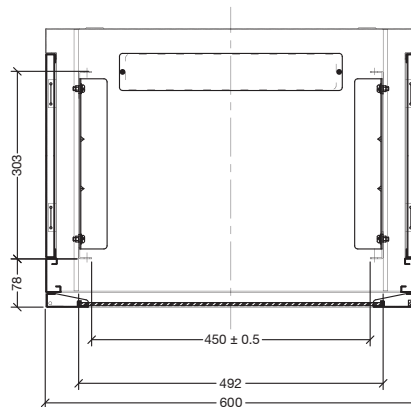

BOTTOM

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

**EIGHT LIMITED**

No.18, 4/F., Thriving Industrial Centre, 26-38 Sha Tsui Road, Tsuen Wan, N.T., Hong Kong TEL : (852) 2413 2222 FAX : (852) 2411 3000 EMAIL : info@eightgroup.com