


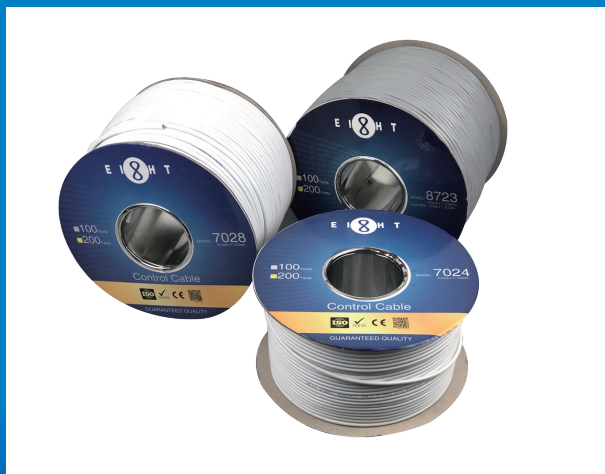

Features

- Power limited controls
- Single line telephone
- Security systems
- LSZH Jacket option available

Specifications

Model	7024	7024 LSZH	7028	7028 LSZH	8723	8723 LSZH	8761	8761 LSZH
Conductor	Material	TC	TC	TC	TC	TC	TC	TC
	Cores	4	4	8	8	2x2	2x2	2
	Max Resistance(20°C)	80 Ω/km	80 Ω/km	80 Ω/km	80 Ω/km	52 Ω/km	52 Ω/km	52 Ω/km
	Construction(No./mm)	7 / 0.2 mm	7 / 0.2 mm	7 / 0.2 mm	7 / 0.2 mm	7 / 0.25 mm	7 / 0.25 mm	7 / 0.25 mm
Insulation	Insulation	PVC	PVC	PVC	PVC	PVC	PVC	PVC
	Insulation Dielectric	1.1 mm ± 0.1 mm	1.1 mm ± 0.1 mm	1.1 mm ± 0.1 mm	1.1 mm ± 0.1 mm	1.2 mm ± 0.1 mm	1.2 mm ± 0.1 mm	2.1 mm ± 0.1 mm
	Insulation Color	White, Black, Orange, Red	White, Black, Orange, Red, Blue, Green, Yellow, Brown	White, Black, Orange, Red, Blue, Green, Yellow, Brown	White, Black, Green, Red	White, Black, Green, Red	White, Black, Green, Red	White & Black
	AL Foil	/	/	/	/	AL Foil	AL Foil	AL Foil
Shield	Drain wire(No./mm)	/	/	/	/	7/0.2 mmTC	7 / 0.25 mmTC	7 / 0.25 mmTC
	Jacket Material	PVC	LSZH	PVC	LSZH	PVC	LSZH	PVC
Jacket	Jacket Color	White	White	White	White	Grey	Grey	Grey
	Jacket Thickness	0.6 mm ± 0.05 mm	0.65 mm ± 0.05 mm	0.65 mm ± 0.05 mm	0.65 mm ± 0.05 mm	0.7 mm ± 0.05 mm	0.85 mm ± 0.05 mm	0.85 mm ± 0.05 mm
	Jacket O.D	4.1 mm ± 0.2 mm	5.1 mm ± 0.2 mm	5.1 mm ± 0.2 mm	5.1 mm ± 0.2 mm	5.2 mm ± 0.2 mm	5.4 mm ± 0.2 mm	5.4 mm ± 0.2 mm
Operation Temperature		-20 °C ~ +60 °C		-20 °C ~ +60 °C		-20 °C ~ +60 °C		-20 °C ~ +60 °C
Length	100 Yards / 200 Yards	200 Yards / 300M	100 Yards / 200 Yards / 300M	200 Yards / 300M	100 Yards / 200 Yards / 300M	200 Yards / 300M	200 Yards / 300M	200 Yards / 300M
Construction								

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.