


- 2-way socket
- USB Charging Ports: 3 x USB-C, 1 x USB-A (Total Max 25W)
- Comply with BS1362 standard fuse protection
- Certification by accredited lab recognised by Hong Kong EMSD
- 13A independent On / Off Switches
- USB: Over-load, Over-heat and Short circuit protection
- Wall mount design, fixed in any position

E2P4UC Extension Socket with USB Charger

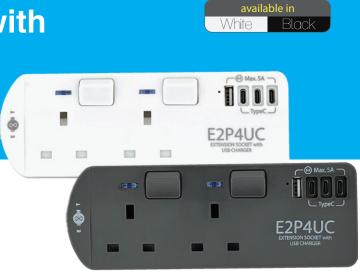

Specification

General	
Socket	2
Rate Voltage	230V AC 50Hz
Rate Current	13 Amps max.
Power Indicator	Neon
Rate Power	2990 watts max.
Plug	Fused HK plug
4 USB Output	Total Max 25W
Type-C	DC5V / 3A (Max.15W)
USB-A	DC5V / 2.4A (Max.12W)
International Safety Standard	Hong Kong: BS1363
	International: EN 62368, EMC, EN 62680

Specifications subject to change without notice.

Eight Limited

No.18, 4/F., Thriving Industrial Centre, 26-38 Sha Tsui Road, Tsuen Wan, N.T., Hong KongTel: (852) 2413 2222Fax: (852) 2411 3000Email: info@eightgroup.com

